

1.5t TELESCOPIC SPREADER BEAM

Maxirig
QUALITY LIFTING SOLUTIONS



MODEL
TSB1015

SPECIFICATION

Tare Weight:	0.025t (Excl. slings/shackles)
Lifting lugs (top) suit:	1.5t Grade S bow shackle
Load lugs (lower) suit:	1.5t Grade S bow shackle
Centre lug:	Not fitted


ASSURANCE

Compliance Standard:	AS4991-2004
Proof load tested:	Yes
NDT Weld Inspection:	Yes
Standard Finish*:	Painted (G36 Green)

*Other colours/finishes available on request

LOAD CHART

Span (Mtrs)	WLL (at included sling angle)				Approx. Sling Leg Length (Mtrs)			Approx. Headroom (Mtrs)		
	60°	90°	120°	CENTRE LIFT	60°	90°	120°	60°	90°	120°
1.8m	1.5t	1.5t	NA	NA	1.8	1.3	1.0	1.6	0.9	0.5
1.9m	1.5t	1.5t	NA	NA	1.9	1.3	1.1	1.6	1.0	0.5
2.0m	1.5t	1.5t	NA	NA	2.0	1.4	1.2	1.7	1.0	0.6
2.1m	1.5t	1.5t	NA	NA	2.1	1.5	1.2	1.8	1.1	0.6
2.2m	1.5t	1.5t	NA	NA	2.2	1.6	1.3	1.9	1.1	0.6
2.3m	1.5t	1.5t	NA	NA	2.3	1.6	1.3	2.0	1.2	0.7
2.4m	1.5t	1.5t	NA	NA	2.4	1.7	1.4	2.1	1.2	0.7
2.5m	1.5t	1.5t	NA	NA	2.5	1.8	1.4	2.2	1.3	0.7
2.6m	1.5t	1.5t	NA	NA	2.6	1.8	1.5	2.3	1.3	0.8
2.7m	1.5t	1.5t	NA	NA	2.7	1.9	1.6	2.3	1.4	0.8
2.8m	1.5t	1.5t	NA	NA	2.8	2.0	1.6	2.4	1.4	0.8
2.9m	1.5t	1.5t	NA	NA	2.9	2.1	1.7	2.5	1.5	0.8
3.0m	1.5t	1.5t	NA	NA	3.0	2.1	1.7	2.6	1.5	0.9

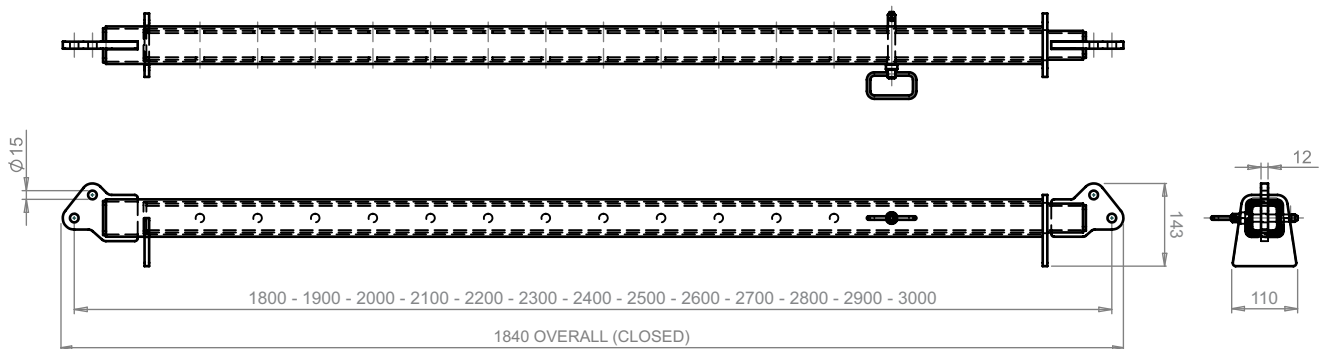

SUPERIOR QUALITY LIFTING PRODUCTS AUSTRALIA WIDE
All Maxirig products are designed and manufactured in Australia by our highly skilled team of engineers

maxirig.com.au